


Precision **WIG/TIG Schweißbrenner**
*Welding torches / Torches de soudage /
 Antorchas de soldadura*

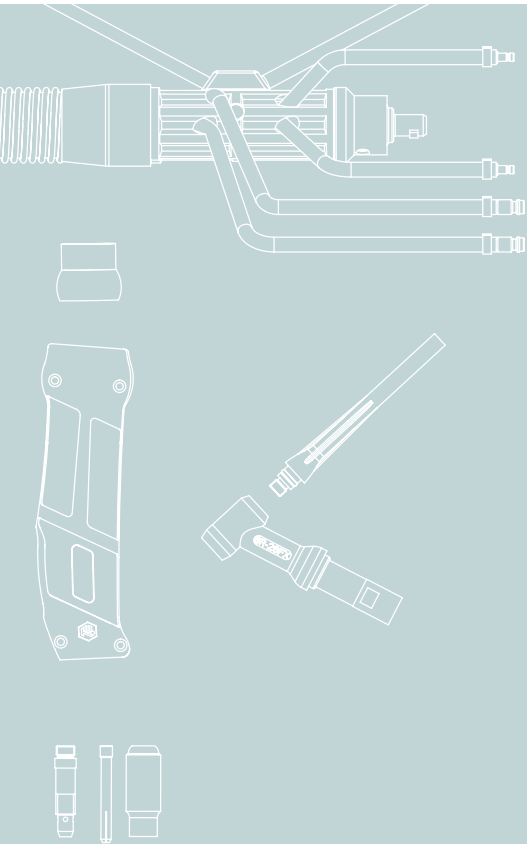

Standard: Gummi-Überzugschlauch, hochspannungsfest bis 10 kV
Option: Leder- oder Textil-Überzugschlauch (nicht hochspannungsfest)

Standard: Rubber outer cover, high voltage resistant up to 10 kV
Option: Leather or textile outer cover (not high voltage resistant)

Standard: Housse en caoutchouc, résistante jusqu'à 10 kV
Option: Housse en cuir ou textile (ne pas résistante à la haute tension)

Estándar: Funta de goma, resistente a alta tension hasta 10 kV
Opción: Funta de cuero o textil (no resistente a alta tension)

Precision

luftgekühlt / air cooled / refroidissement par air / refrigeradas por aire



TBi SR 9 (FX)
TBi SR 9 V (FX)
60% (10 min.)
AC: 95 A
DC: 110 A
Ø 0.5-1.6 mm

TBi SR 17 (FX)
TBi SR 17 V (FX)
60% (10 min.)
AC: 125 A
DC: 140 A
Ø 0.5-2.4 mm


TBi SR 24G
60% (10 min.)
AC: 95 A
DC: 110 A
Ø 0.5-1.6 mm

TBi SR 25G FX
60% (10 min.)
AC: 95 A
DC: 110 A
Ø 0.5-2.4 mm

TBi SR 26 (FX)
TBi SR 26 V (FX)
60% (10 min.)
AC: 200 A
DC: 240 A
Ø 0.5-4.0 mm

Precision

wassergekühlt / water cooled / refroidissement par eau / refrigeradas por agua

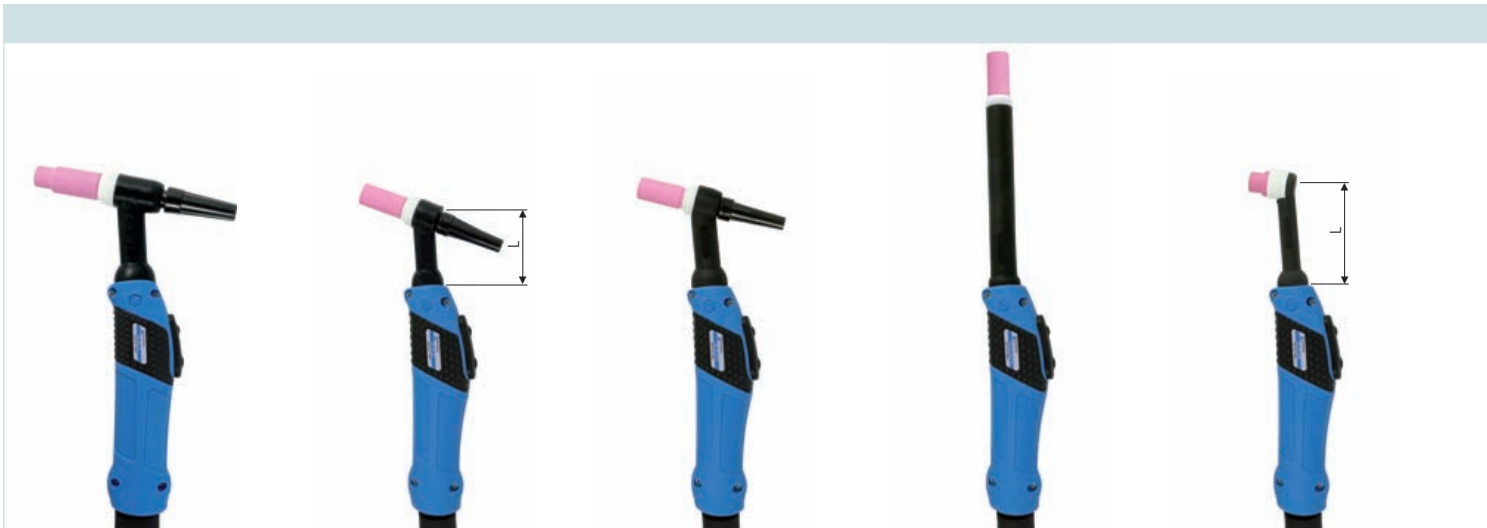

TBi SR 18 (FX)
TBi SR 18 V (FX)
100% (10 min.)
AC: 240 A
DC: 320 A
Ø 0.5-4.0 mm

TBi SR 20 (FX)
TBi SR 20 V (FX)
100% (10 min.)
AC: 200 A
DC: 220 A
Ø 0.5-3.2 mm
FX: L= 50, 100, 125 mm

TBi SR 20 H
100% (10 min.)
AC: 220 A
DC: 260 A
Ø 0.5-3.2 mm

TBi SR 25W FX
100% (10 min.)
AC: 125 A
DC: 140 A
Ø 0.5-3.2 mm

TBi SR 24W (FX)
100% (10 min.)
AC: 125 A
DC: 140 A
Ø 0.5-2.4 mm
FX: L= 75, 100, 125 mm

Module / Modules / Les modules / Módulos

**A Standard-Modul: Doppeltaster**

Double function switch / Double gâchette / Pulsador doble

B Modul P1: Doppeltaster mit Poti, 10 k Ω

Double function switch with poti, 10 k Ω / Double gâchette et poti, 10 k Ω / Pulsador doble y potenciómetro, 10 k Ω

C Modul P2: Doppelhebel

Dual levers / Double levier / Manetas dobles



TBi Kaltdrahtsystem / TBi cold wire supply / TBi aménage de fil froid / TBi alimentación de hilo frío



Brenner mit Ventil / Torch with valve / Torche à valve / Antorcha con válvula



**TBi AW 424
TBi AW 428**
100% (10 min.)
AC: 280 A
DC: 400 A
Ø 0.5-4.0 mm



TBi AW 427
100% (10 min.)
AC: 350 A
DC: 500 A
Ø 0.5-8.0 mm



TBi SR 400
100% (10 min.)
AC: 400 A
DC: 450 A
Ø 0.5-4.8 mm



TBi SR 12
100% (10 min.)
AC: 450 A
DC: 500 A
Ø 1.6-6.4 mm

Ready for Tomorrow.

Alle gängigen Maschinenanschlüsse lieferbar

Torch connections for all types of welding machines / Connecteurs torches pour tous les postes à souder / Conexiones para todos los tipos de máquinas de soldadura


Luftgekühlt

Air cooled / Refroidissement par air / Refrigeradas por aire



Wassergekühlt

Water cooled / Refroidissement par eau / Refrigeradas por agua

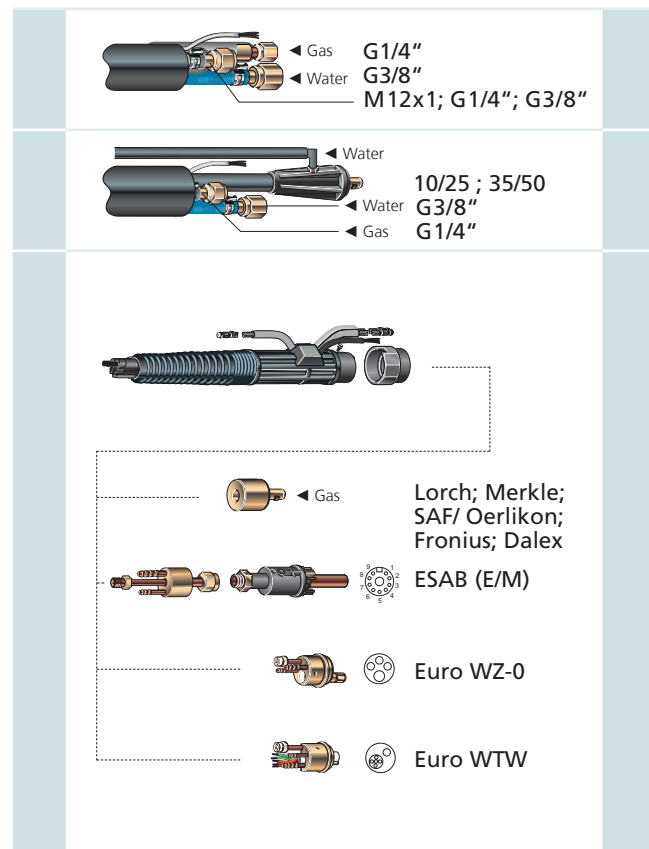

© 2008 TBi Industries GmbH. Alle Rechte vorbehalten. Technische Änderungen vorbehalten. Kopie oder Nachdruck auch auszugsweise nicht gestattet. / All rights reserved. Subject to change without notice. Excerpts and reprints not permitted. / Tous droits réservés. Sous réserve de modifications techniques. Copie/reproduction même partielle non autorisée. / Todos derechos reservados. TBi se reserva modificaciones técnicas. Copia y reimpresión, tampoco en partes, no permitido. Nr. DOKP12100C, 01/2008.